

PLENTICORE

Hybrid inverter - G3 4.0-20 kW



Data sheet

PLENTICORE G3: The original. New thought!

All-in-one

- Can be used universally as PV, hybrid or battery inverter
- Optionally releaseable Battery input^{1, 2)}
- Optional power upgrade¹⁾
- Compatibility with various high-voltage batteries²⁾
- Backup power capable (backup function) with external switchover device
- 3 MPP trackers for maximum flexibility
- Extended MPP range - perfect for repowering

Easy to install

- Simple device configuration with commissioning wizard via display, smartphone with web browser or KOSTAL Solar App.
- Safe installation thanks to clearly arranged, separate terminal compartment with Push-In terminals and protected power electronics
- DC overvoltage protection type 2 optionally retrofittable
- Always up to date with the latest software thanks to AutoUpdate



Smart performance

- Fast, self-learning shadow management for maximum yields
- Dynamic active power control and 24-hour home-consumption measurement²⁾
- Low conversion losses due to DC coupling and high-voltage battery
- High DC input currents (17A/30A)
- Prepared for additional battery charge via AC energy sources²⁾

Smart connected

- Smart Communication Board: control interfaces integrated as standard
- Display, data logger and system monitoring
- Free KOSTAL Solar Portal and KOSTAL Solar App for monitoring the PV system
- 2 x LAN, WiFi, 4 x digital switching outputs for self-consumption control or event reporting, "SG Ready" compatible, evaluation of external overvoltage protection modules
- Modbus/SunSpec (TCP) for SmartHome integration

PLENTICORE G3: compact and rapidly deployable



¹⁾ Optional battery and power upgrade available for a fee from your wholesaler.

²⁾ Compatible energy meter required (see document Released energy meters in the download area for the product)

PLENTICORE G3: Technical data

PLENTICORE G3			S			M			L			
Basic power		kW	4.0			8.5			15			
Optional power upgrade level 1 ¹⁾		kW		5.5			10			17.5		
Optional power upgrade level 2 ¹⁾		kW			7.0			12.5			20	
Input side (DC)	Max. PV power	kWp	6	8.25	10.25	12.75	15	18.75	22.5	26.5	30	
	Max. PV power per DC input ⁶⁾	kW	6	8.25	8.25	12.75	13.5	13.5	21	21	21	
	Nominal DC power	kW	4.08	5.61	7.14	8.67	10.2	12.75	15.3	17.85	20.4	
	Rated input voltage (U _{DC,r})	V	650									
	Start-up input voltage (U _{DCstart})	V	95									
	Max. system voltage (U _{DCmax})	V	1000									
	MPP range at rated output (U _{MPPmin}) ³⁾	V	80	110	140	170	200	250	170	198	227	
	MPP range at rated output (U _{MPPmax}) ³⁾	V	800	800	800	800	800	800	800	800	800	
	Working voltage range (U _{DCworkmin} - U _{DCworkmax}) ⁴⁾	V	75...900									
	Max. input current (I _{DCmax}) DC1/DC2 input	A	17			17			30			
	Max. input current (I _{DCmax}) DC3 input	A	17			30			30			
	Max. PV short-circuit current (I _{SC_PV}) DC1/DC2 input	A	23.8			23.8			42.0			
	Max. PV short-circuit current (I _{SC_PV}) DC3 input	A	23.8			42.0			42.0			
	Number of DC inputs		3									
	Number of combined DC inputs (PV or battery)		1									
	Number of independent MPP trackers		3									
	DC 3 – battery input optional											
	Min. working voltage for battery input (U _{DCworkbatmin})	V	95									
	Max. working voltage for battery input (U _{DCworkbatmax})	V	820									
	Max. charging/discharging current at battery input	A	17/17 ⁷⁾			30/30			30/30			
Max. battery power DC input	kW	6	8.25	8.25	12.75	13.5	13.5	21	21	21		
Output side (AC)	Rated power. cos φ = 1 (P _{AC,r})	kW	4.0	5.5	7.0	8.5	10	12.5	15	17.5	20	
	Rated power, cos φ = 0.9 (P _{AC,r}) ⁵⁾	kW	3.6	4.95	6.3	7.65	9	11.25	13.5	15.75	18	
	Apparent output power (S _{AC,Nom} , S _{AC,max})	kVA	4.0/ 4.0	5.5/ 5.5	7.0/ 7.0	8.5/ 8.5	10/ 10	12.5/ 12.5	15/ 15	17.5/ 17.5	20/ 20	
	Min. output voltage (U _{ACmin})	V	320									
	Max. output voltage (U _{ACmax})	V	460									
	Rated AC current (I _{AC,r})	A	5.8	7.9	10.1	12.3	14.4	18	21.7	25.3	28.9	
	Max. output current (I _{ACmax})	A	11.2			20.0			32.0			
	Short-circuit current (peak/RMS)	A	9.1/ 6.4	12.4/ 8.8	15.9/ 11.3	19.2/ 13.6	22.6/ 16.0	28.2/ 20.0	34.1/ 24.1	39.6/ 28.1	45.4/ 32.1	
	Grid connection		3N~, 230/400V, 50Hz									
	Rated frequency (f _r)	Hz	50									
	Min/max grid frequency (f _{min} /f _{max})	Hz	47 / 52.5									
	Setting range of the power factor (cos φ _{AC,r})		0.8 ... 1 (ind./cap.)									
	Power factor for rated power (cos φ _{AC,r})		1									
	Max. THD	%	3									
	Standby	W	3.5									
Backup operation	Backup power operation		3N~, 230/400V, 51 Hz									
	Nominal apparent power in backup mode ²⁾	kVA	7.0			12.5			20			
	Nominal power per phase	kW	2.33			4.16			6.66			
	Range cos φ		0...1									
	Start-up apparent power for min. 5 sec at U _{AC,r}	kVA	7.7			13.8			22.1			
	Max. output current per phase	A	11.2			20			32			
	Start time with manual KOSTAL BackUp Switch	s	<5									
	Start time with automatic backup box	s	<30									
Operating hours in backup mode	h	5000										

¹⁾ Optional battery and power upgrade available for a fee from your wholesaler.

²⁾ Nominal output power: The actual output power depends on the system and storage size.

³⁾ MPP range at rated output: Outside the MPP range, MPP control takes place below the nominal power. Based on full occupancy of all MPP trackers.

⁴⁾ Working voltage range: No feed-in takes place outside the working voltage range.

⁵⁾ Nominal power defined for Italy

⁶⁾ From SW 3.06.00

⁷⁾ Limited charge/discharge current 7.1–17 A (in the voltage range 75–175 V)

PLENTICORE G3			S	M	L
η	Max. efficiency	%	98.03	98.14	98.21
	European efficiency	%	97.20	97.49	97.72
	MPP adjustment efficiency	%	99.9		
System data	Topology: Without galvanic isolation – transformerless		yes		
	Protection class according to IEC 60529		IP 65		
	Protective class according to IEC 62103		I		
	Overvoltage category according to IEC 60664-1, input side (PV generator)		II		
	Overvoltage category according to IEC 60664-1, output side (grid connection)		III		
	DC overvoltage protection module type 2 - optionally retrofittable		yes		
	Degree of contamination		4		
	Environmental category (outdoor installation)		yes		
	Environmental category (indoor installation)		yes		
	UV resistance		yes		
	AC cable diameter (min-max)	mm	10 ... 28		
	AC cable cross-section (min-max)	mm ²	2.5 ...10	4...10	6...10
	DC cable cross-section (PV/BAT) (min-max)	mm ²	2.5 ...6 / 4...6	2.5 ...6 / 6	4...6 / 6
	Max. fuse protection on output side according to IEC 60898-1		B16/C16	B25/C25	B32/C32
	Internal operator protection according to EN 62109-2		yes		
	Independent disconnection device according to VDE 0126-1-1		yes		
	Mechanical DC disconnecter according to IEC 60947-3		yes		
	Height/width/depth	mm	561 / 409 / 237		
	Weight	kg	21.8	22.3	24.3
	Cooling principle – regulated fans		yes		
	Max. air throughput	m ³ /h	184		
	Noise emission (typical)	dB(A)	39		
	Ambient temperature	°C	-20...60		
	Max. installation altitude above sea level	m	2000		
	Relative humidity	%	4...100		
	Connection technology, DC side		SUNCLIX plug		
	Connection technology, AC side		Spring-type terminal strip		
	Connection technology, interfaces		Push-In terminal		
Interfaces	Ethernet LAN (RJ45) / WiFi (IEEE 802.11b/g/n 2.4GHz)		2 / yes		
	Connection of energy meter for collecting energy data (Modbus RTU)		yes		
	Connection external switching device (backup)		yes		
	Digital inputs		Ripple control receiver or external battery control, CEI, OVP monitoring		
	Digital outputs		4 (24 V, 100 mA)		
	Clamping range, connection terminals, interfaces (min-max)	mm ²	0.2 ... 1.5		
	Webserver (user interface)		yes		
	Warranty (Smart Warranty / Smart Warranty plus ¹⁾)	Years	10 (5 + 5)		
	Directives/Certification ²⁾		CE, GS, CEI 0-21, C10/11, EN 62109-1, EN 62109-2, EN 60529, EN 50438, EN 50549-1, NA/EEA, G98, G99, EIFS2018, IEC 61727, IEC 62116, RD 1699, RD 647, RFG, TOR Erzeuger, UNE 206006, UNE 206007-1, VDE 0126-1-1, VDE-AR-N 4105, VJV2018		

Subject to technical changes. Errors excepted. You can find current information at www.kostal-solar-electric.com. Manufacturer: KOSTAL Industrie Elektrik GmbH, Hagen, Germany

¹⁾ Activate your free warranty (Smart Warranty) now in the KOSTAL Solar online shop (shop.kostal-solar-electric.com). For Smart Warranty Plus, you must also register your device in our KOSTAL Solar portal. This does not affect your statutory warranty. You will find more information about the service and warranty conditions in the download area for your product.


²⁾ Information on available Directive/parameter sets can be found in the product download area in the document 'Initial commissioning - Country setting'.
Directive EN50438, EN50549-1: does not apply to all national annexes

PLENTICORE G3: Overview of all power classes




Purchase the PLENTICORE inverter with a basic power of S, M or L.
The basic power can be optionally upgraded in two stages.
This gives you maximum flexibility when planning your system - even at a later date without replacing the inverter.


PLENTICORE S G3

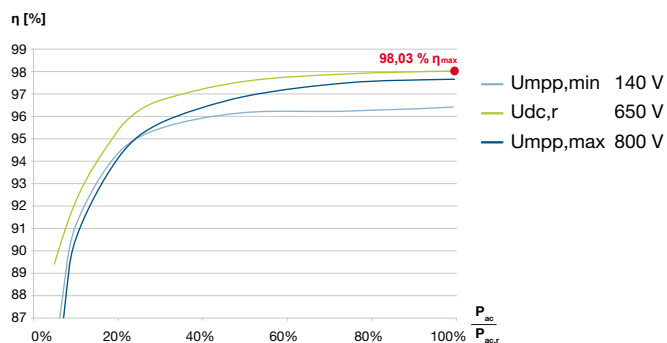

PLENTICORE M G3

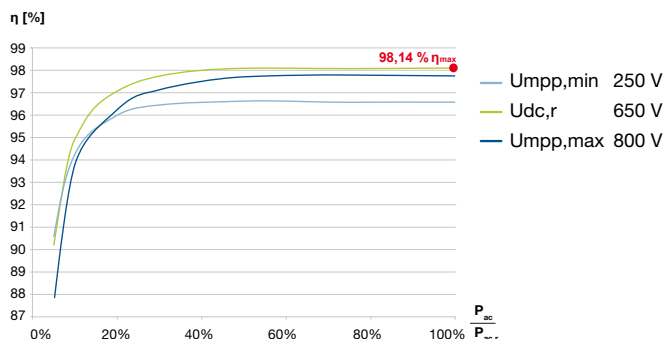

PLENTICORE L G3

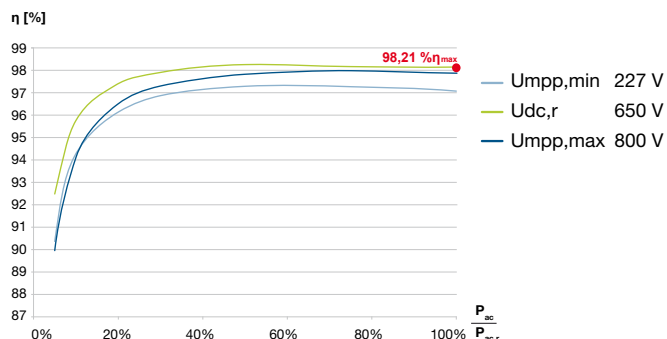

PLENTICORE

S
4.0 - 7.0 kW

M
8.5 - 12.5 kW

L
15 - 20 kW

Basic power [kW]

4.0

8.5

15

Optional
power upgrade [kW]
Level 1

5.5

10

17.5

Optional
power upgrade [kW]
Level 2

7.0

12.5

20



Optional battery and power upgrade available for a fee from your wholesaler.

Services for our products

Activation of the KOSTAL Smart Warranty via shop.kostal-solar-electric.com
You can find all further information at www.kostal-solar-electric.com

